



TOTAL DESIGN FOR
BEST PERFORMANCE



NEW



**APP
OKSYSGEN**



DUA-LITE

INNOVATION IN THE **A/C RECHARGING SERVICE**



ECOS



ECOS 302 / ECOS 302 YF

CHARACTERISTICS

	ECOS 302	ECOS 302 YF
	SCE302R	SCE302H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	•	•
HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION refillable/hermetic bottles (OIL LOCK)	•	•
AUTOMATIC DYE INJECTION refillable/hermetic bottles (OIL LOCK) 0-PK00096	✓	✓
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (CFU-NITRO / CFU-NITRO.HD.XX)	✓	✓
INTERNAL FLUSHING	•	•
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	•	•
CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a 0-PK00097	•	•
BLUETOOTH CONNECTION APP OKSY [®] GEN+	•	•



• STANDARD SUPPLY ✓ OPTION

ACCESSORIES

	CODE	DESCRIPTION	ECOS 302	ECOS 302 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HFO1234YF		✓
	0-PK00051 0-PK00051 OPZ	Printer kit	✓	✓
	ACC-BLK-ECOS300	Antidust Blanket	✓	✓



NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE

CFU-NITRO




Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE

CFU-NITRO.HD.XX

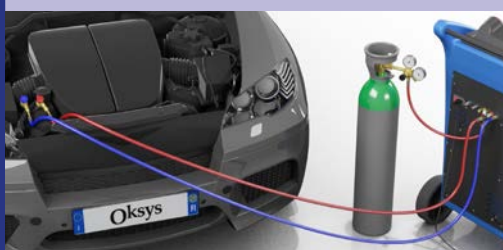

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

RANGE

R134a



R1234yf



MODEL

ECOS 302

ECOS 302 YF

TECHNICAL FEATURES

Display	Graphic LCD 128x64 Pixel	Graphic LCD 128x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	9 Kg	9 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	50 l/min	50 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	51x48x94 cm	52x56x99 cm
Weight	55/64 Kg	57/66 Kg
Packaging dimensions	54x58x116 cm	54x58x116 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	3m	3m
Blanket	Option	Option
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	NO	NO



Oksys

TOTAL DESIGN FOR
BEST PERFORMANCE